

The Diamond® retaining wall system is the contractor's choice for wall construction. Straight- or beveled-face shapes offer design freedom. Optional step and cap accessories provide even more design versatility. For an attractive retaining wall with enduring performance, the Diamond product is the perfect choice.

- Original rear-lip locator
- Gravity walls up to 4 feet 6 inches high, including buried course, but excluding the cap*
- Taller walls can be built using geosynthetic reinforcement or the Anchorplex[™] retaining wall system when designed by a qualified engineer
- ICC evaluated

Straight Face

- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 8 feet

Beveled Face

- Minimum outside radius, measured on the top course to the front of the units: 2 feet
- Minimum inside radius, measured on the base course to the front of the units: 4 feet

*This height assumes cores are filled with drainage aggregate, level backfill and clean, compacted sand or gravel and no surcharge.



Diamond®

RETAINING WALL SYSTEM

Diamond®

RETAINING WALL SYSTEMS






No pins. No mortar. No misalignments. Rear-lip locator, invented by Anchor, makes installation fast and accurate. Anchor – the original rear-lip product!



© 2011 Anchor Wall Systems, Inc. The Diamond* wall system is manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor A" and "Anchor Build Something Beautiful" logos, "Anchorplex" and "Diamond" are trademarks of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see anchorwall.com.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.

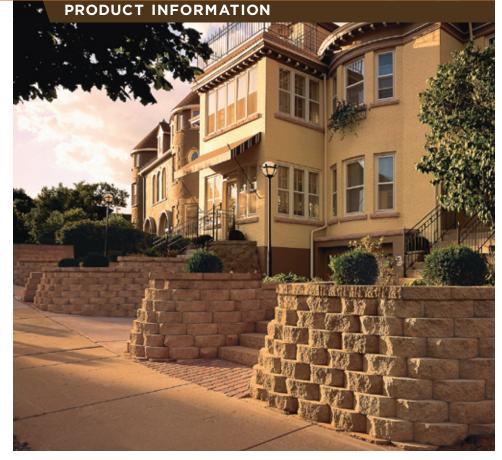

Visit anchorwall.com for installation instructions.

	A State of the second sec	
Stretcher Units	Straight Face	Beveled Face
Approximate Dimensions*	6" x 17 ¹ / ₄ " x 12"	6" x 15 ⁷ / ₈ " x 12"
Approximate Weight*	72 lbs.	68 lbs.
Coverage	0.72 sq. ft.	0.67 sq. ft.
Setback/System Batter	1 ¹ / ₈ "/10.6°	1 ¹ / ₈ ″/10.6°

	Instanting	C REAL FROM
Accessory Units	Сар	Step
Approximate Dimensions*	Front, 3" x 17¹/4" x 10³/8" Back, 3" x 12" x 10³/8"	6" × 16" × 12" 6" × 16" × 12"
Approximate Weight*	34 lbs.	89 lbs.
Coverage	1.22 lin. ft.	

*Product dimensions are height by face length by depth. Actual dimensions and weights may vary from these approximate values due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for details, color options, block dimensions and additional information.

A&B0810

72.3076.1 10/11 4015



LOCATIONS & CONTACT INFO

ASP ENTERPRISES

aspent.com salesasp@aspent.com

St. Louis, MO 636.343.4357 Kansas Citv. MO 816.554.1191

Omaha, NE 402.861.8579 Wichita. KS 316.393.1554

Enterorises

303.696.8960 Loveland. CO 970.535.0863

Denver, CO Colorado Springs, CO 719.257.7840

Bowman Construction

Supply Inc.

OUICK SUPPLY CO. quicksupplyco.com salesbcs@bowmanconstructionsupply.com salesquick@quicksupplyco.com

Des Moines. IA

515.289.1271

Quick Supply Co.

CASCADE GEOSYNTHETICS

cascadegeos.com salescascade@cascadegeos.com

> Portland, OR 971.339.1020

SOLUTIONS WE SUPPLY

GEOSYNTHETICS

Filter Fabrics

Stabilization Fabrics Geogrids

- Road Grids
- Wall Grids
- Slope Stabilization

Specialty Fabrics

Composite Geomembranes

• GCLs, PVC, HDPE, LLDPE, EPDM, Granular Bentonite

SEDIMENT CONTROL

Inlet Protection

• Grated Inlet, Curb Inlet, Area Inlet Protection

Ditch Checks

- Triangle Silt Dike
- GeoRidge

Perimeter Protection

- High and Low-Porosity Silt Fence, Straw Wattles, Silt Socks
- Safety Fence

Flocculants & Water Treatment

 Polymer-Based & Natural Flocculants Sediment Basin Skimmers **Dewatering Bags**

Trackout Control

- FODS
- Rumble Grates

Turbidity Curtains

EROSION CONTROL

Basic Hydraulically Applied Mulches

- Wood
- Paper
- Blends
- Straw

High-Performance Hydraulically

- Applied Products
 - BFM
 - FGM
 - Additives & Tackifiers

Temporary Erosion Control Blankets

- Coir & Jute Mat/Nettings
- Short-Term ECBs
- Extended-Term ECBs

Permanent Erosion Control Blankets

- Turf Reinforcement Mats
- HP-TRMs
- Anchor Reinforced Vegetation System

Structural BMPs

- Transition Mats
- Geoweb Cellular Confinement
- Composite Vegetated Armor System
- Flex MSE Vegetated Wall System
- Articulated Concrete Block
- Gabions
- Grout-Filled Geotextile Mats

Vegetation Establishment

- Native Seed & Turf Seed
- Fertilizers
- Organic Soil Additives Stratavault Soil Cells

STORMWATER MANAGEMENT

Water Quality

- Inlet Filter Boxes
- Pre-Treatment Chamber
- Nutrient Separating Baffle Boxes
- High-Flow Biofiltration Media
- Hydrodynamic Separators
- Stratavault

Water Ouantity

- Modular Underground Storage Systems
- Chamber Detention Systems

Drainage

- HDPE Swale Liner
- Pipe & Fittings
- Drainage Composites
- Strip Drain

Inlet Structures

- PVC
- Drain Basins, In-Line Drains
- Landscape

Permeable Pavers

- Permeable Articulating Concrete Block
- Grass Pavers
- Gravel Pavers
- Concrete Pavers

SPECIALTY

Natural & Synthetic Coir Fiber Logs Vegetated Reinforced Soil Slopes Soil Anchors **Root Barrier System** AquaBlok Muscle Wall

We are full line distributors of construction materials for all project types. Contact us for assistance with a project. From specification and development to installation and completion, we're here to help with all of your site solution needs.

GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT SEDIMENT CONTROL | REVEGETATION | HARDSCAPES

BOWMAN CONSTRUCTION SUPPLY bowmanconstructionsupply.com